


Film Preparation

Film Requirements:

- DPI – output 2400 dpi (Dots per inch)
- Line Screen – 85 –100 lpi (Lines per inch)
- Dots – Elliptical Dots not Rounded Dots
- Line Screen Angle:
 - 60 degrees apart
 - Yellow 0 degrees, Magenta 75 degrees, Cyan 15 degrees, and Black 135 degrees

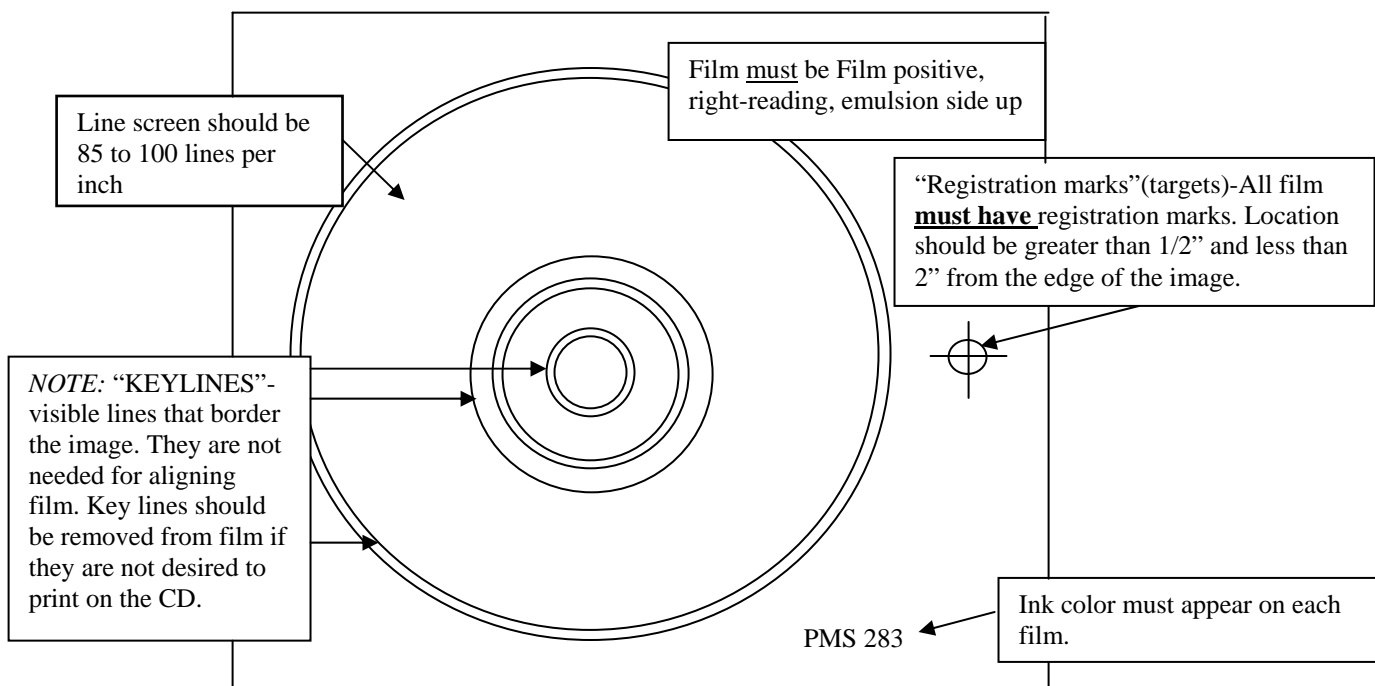

- For best results, “Match Print” or an overlay proof (pulled from the film) must be supplied for all 4 Color Process orders. It is highly recommended that all orders, including those with spot colors, be supplied with a laser proofs.
- There are two areas on the CD that cannot be printed: The center hole, and 3 millimeters from the outer edge of the CD-ROM. These areas must be clear of any image/artwork. Artwork with images in these areas require revision and may be returned to customer for modification, or incur an extra engineering charge if Your Company is required to bring them into specification.
- A separate film is required for each color, (as well as the color sequence desired).
- Artwork, which joins two or more colors, is very demanding and we must have a trap/spread of 0.5pt or 0.18mm used when creating the film.